



# FOLDING ARM AWNINGS & CASSETTE AWNING

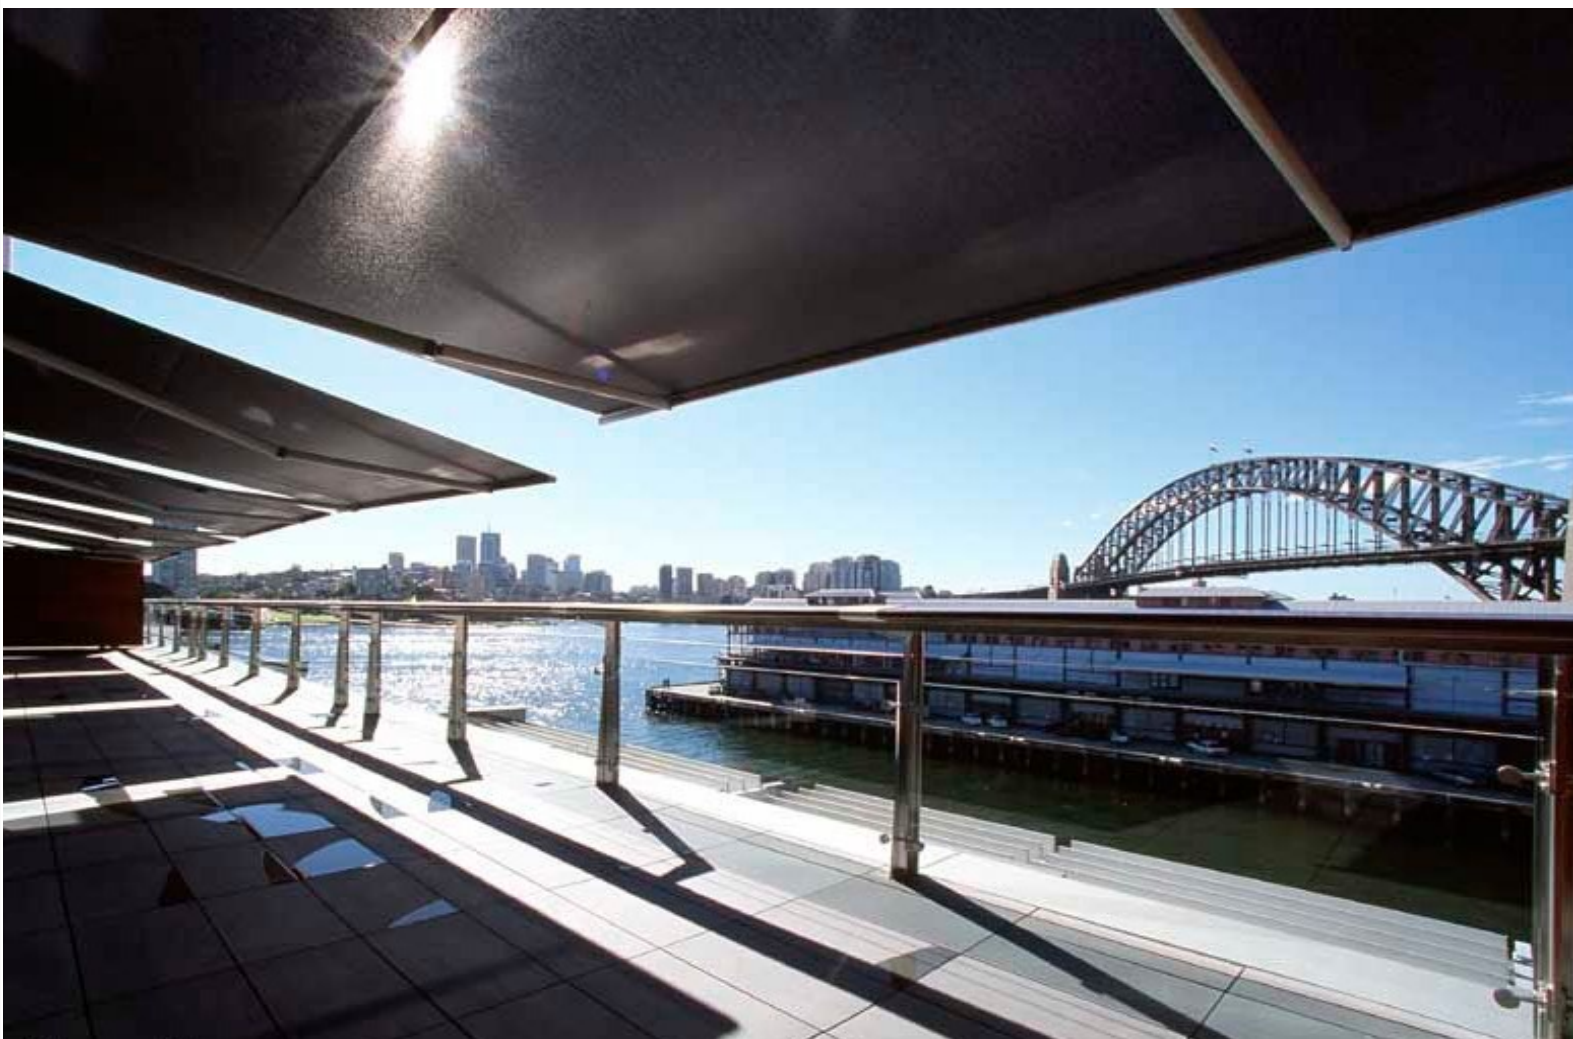

 BEAUFORT WIND SCALE  
Rated up to Category 6

 5 YEAR WARRANTY



**COLOUR DESIGN**  
*over 120 standard  
frame colours*

# THE AWNING THAT MEETS THE HIGHEST DEMANDS IN QUALITY & DESIGN

The full Cassette awning is the superior model of the folding arm series from . Using German technology and stylish Italian design, it perfectly protects the awning fabric and its working parts from the harsh Australian environment with a fully closing cassette. Top quality materials including chromated aluminum and marine grade stainless steel screws

High strength extruded brackets guarantee a sound fixing, even on difficult facades. The Cassette can be fully automated with a sun and wind sensor.



1



3



2

## 1. THE CASSETTE

The elegantly formed Cassette with end caps of cast aluminum offers perfect protection from the elements.

## 2. LED LIGHTING

Optional integrated dimmable LED lighting strip to underside of Cassette.

## 3. THE ARMS

Tested and proven to well over 70,000 full cycles, the Multiflex 4-cable arm system is the strongest of it's kind on the market.

## STRONG ARMS & STRUCTURE

The arm is characterized by its eye-catching design and convincing performance. All components have been developed to ensure smooth functioning and high durability, which have proved themselves in very demanding load tests. The use of high-quality aluminum profiles in combination with high-strength cast and drop-forged components stand for optimal safety even under extreme load.


The specially developed Multiflex power band is made up of four tear-resistant steel cables sheathed in a highly flexible plastic material protecting against corrosion. It applies the force of up to six spring movements in the arm sections and ensures proper tensioning of the awning, whilst still allowing flexibility during gusts of wind.






## INSTALLATION OPTIONS


(dimensions in mm)

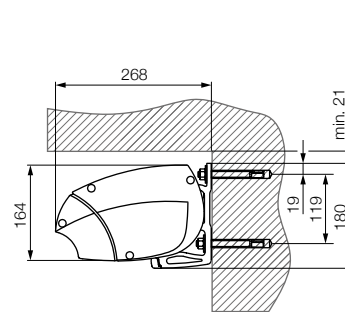

Wall/face mounting

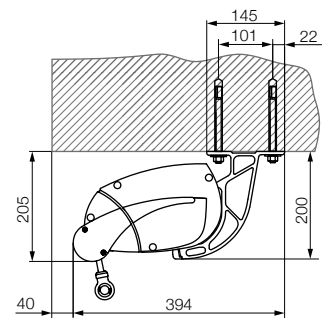


Ceiling/top mounting with a Variovalance

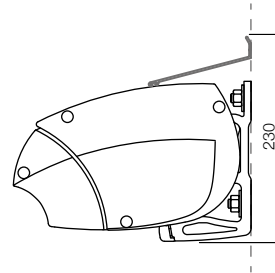


Wall gap profile

Optional extruded profile used to flash the cassette of the awning to the wall.


## OTHER COMMON INSTALLATIONS

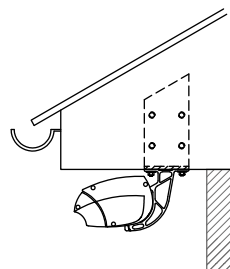


Soffit / under eaves

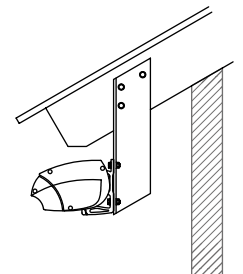

Exposed rafter installation

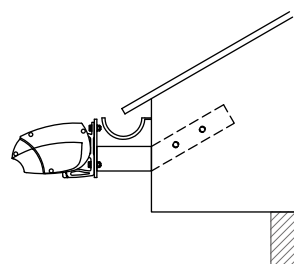

Fascia bracket installation

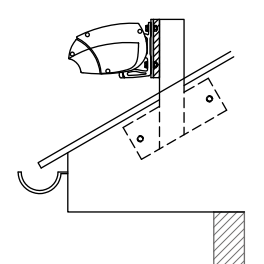

Roof mount

### SYSTEM DETAILS

### CASSETTE AWNINGS

Max width

8,000mm

Coupling system

Up to 12,000mm

Max projection

4,000mm

Installation angle

5-40°

Standard operation

Motor (gear unit & hand crank possible)

Fabric colours

Over 100 fabric colours

Standard frame colours

Over 120 Dulux & custom powdercoat colours

Premium frame colours

Over 50 Dulux Duratec & Electro commercial colours